

SPECIFICATION

MODEL : LX-ECO3S-HP-xxx

(120° Angle, High Power Module)

Powerd by Samsung LED

Supplier		Customer
Written by	Approved by	Approved by

NCLED CO., LTD

Characteristic

CE, UL, KS CERTIFIED

HIGH EFFICIENCY SAMSUNG LED 5630 LED MOUNTED

IP68 RATING

120° COVER LENS APPLIED

DAMP.PROOF DESIGN TO PREVENT DAMAGE FOR LED & OTHER PARTS

EXCELLENT PROTECTION RATE AGAINST RAIN, DIRECT LIGHT AND ULTRAVIOLET RAYS

COMPACT DESIGN AND CONVENIENT USABILITY

TRACEABILITY MANAGEMENT SYSTEM & QUALITY CONTROL MARKING SERIAL CODE

CO TRACEABILITY MANAGEMENT SYSTEM & QUALITY CONTROL MARKING SERIAL CODE

50,000HOURS RATED LIFE TIME (L70)




Application note

BEST SUBSTITUTE FOR GENERAL CHANNEL LETTER SIGNAGE


MODIFIED FOR THE BEST UNIFORMITY

BACK LIGHT FOR LIGHT BOX

Product Image

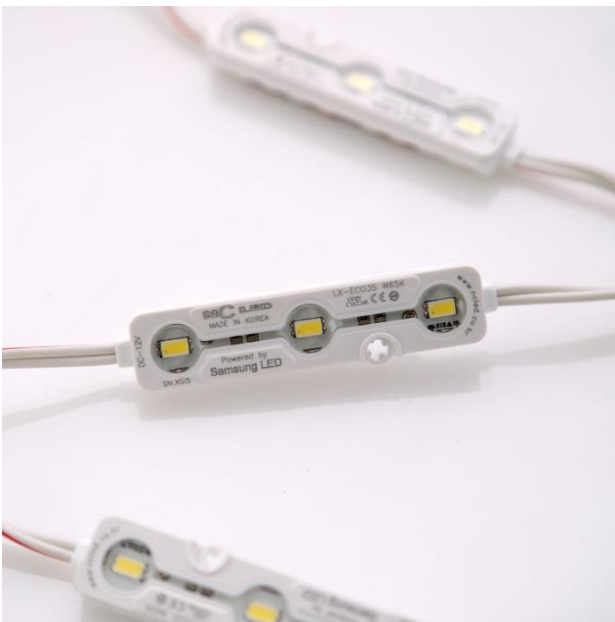

Dimension

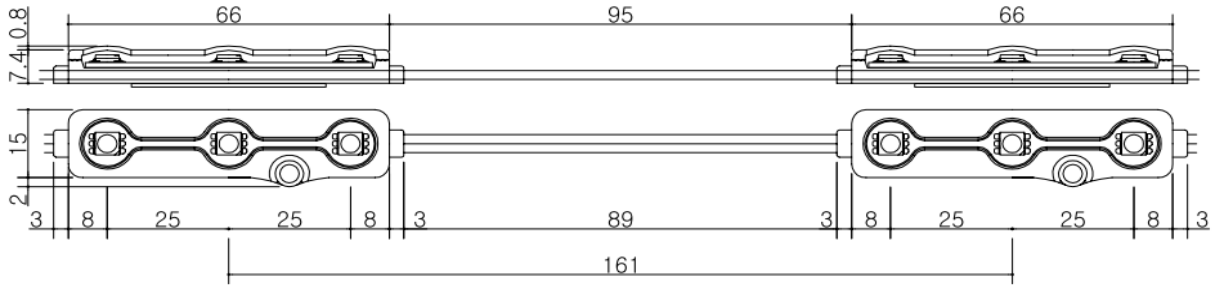

Specification

Item	Value								Unit
	W12	W95	W65	W57	W50	W40	W30	W27	
Model no	W12	W95	W65	W57	W50	W40	W30	W27	
Power Dissipation	1.2W								Watt
Forward Voltage	12								VDC
Forward Current	100								mA
Driving System	Constant Voltage								-
Luminous Flux	14	114	120	120	120	120	114	108	lm
Luminance Efficiency	95	95	100	100	100	100	95	90	lm/W
CCT(K)	12000	9500	6500	5700	5000	4000	3000	2700	Kelvin
CRI (Ra)	75	75	80	80	80	80	80	80	%
Viewing angle	120°								deg
LED maker	5630PKG x 3EA / Samsung LED								-
Module Pitch	161								mm
Size	72 x 17 x 8.5								mm
Weight	11								g
Max in series	50								EA
Operating Temp	-20 ~ 50								°C
Storage Temp	-30 ~ 70								°C
Waterproof	IP68								
Life Time	50,000								Hour
Cable	AWM2468-AWG18, UL								
LENS materials	PMMA, UL-94								
Case materials	PC/ABS, UL-94 , V-2								

Photometric characteristics

Color Parameters:


Chromaticity Coordinate: $x=0.2884$ $y=0.2855/u'=0.1972$ $v'=0.4393$
 CCT=9305K (Duv=-0.0064) Dominant WL:Ld =475.7nm Purity=19.9%
 Ratio:R=12.9% G=80.8% B=6.3% Peak WL:Lp=446.7nm FWHM=19.5nm
 Render Index:Ra=84.5

Photo Parameters:

Flux = 121.6 lm Eff. : 98.52 lm/W Fe = 437.9 mW

Electrical parameters:

V = 11.998 V I = 0.1029 A P = 1.235 W PF = 1.000

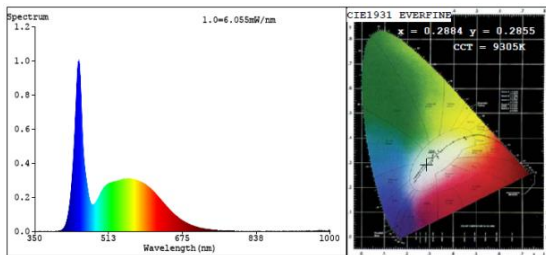

LED Specification

Absolute Maximum Rating



Item	Symbol	Rating	Condition
LED junction temperature	T_J	110℃	-
Forward Current	I_F	150 mA	-
Peak Pulsed Forward Current	I_{FP}	300 mA	Duty 1/10 pulse width 10ms
Thermal resistance	$R_{th, j-s}$	16℃/W	Junction to solder point
ESD	-	5kV	HBM

LM80- Test Summary

Life test condition			Summary of result		
Test condition	Current (mA)	Case temperature (℃)	Test duration (h)	Average lumen maintenance (%)	Maximum chromaticity shift ($\Delta u'v'$)
1	100	53.8℃	6000	98.9	0.0010
2	100	84.6℃	6000	97.8	0.0018
3	100	104.9℃	6000	92.4	0.0032